

WE CUSTOM-BUILD YOUR LIFT ACCORDING TO YOUR SPECIFICATIONS. ALSO.

SWEDISH
QUALITY
LIFTS

OUR OWN MANUFACTURE OF CUSTOM-BUILT
PLATFORM LIFTS SINCE 1980.

NAMI
LIFT

"New deeper size enables the transportation of double pallets"



Our reliable passenger and goods lifts are used all over Europe, both indoors and outdoors. The products comply with high quality demands, have safe designs and are installed quickly and easily thanks to our advanced pre-assembly. The models in our range suit all environments, even those with tight spaces, and can be custom-built to your needs and specifications. Our lifts are popular on the market and are renowned for their smart features, attractive design and silent, smooth running. Welcome to Nami.



GL800 Hörby, Lundegården Elderly Accommodation

The lift - an indispensable convenience that makes life easier for tenants, visitors and customers of all ages. Choose one with a simple installation, safe design and low operational cost.



PL400 Hässleholm, Norra Station



World class integrated technology and secure safety system.

Smart, galvanized canopy protects against the weather.



The new built-in panel in the GL2000 model is free from projecting parts for maximum durability.

Durable carpet or aluminium footboard vouches for good wearing qualities and a long service life.

Stable, easy to grip handrail.



PL400 Lund Public Library



"Houses with lifts.
Homes of the future."



GL800 Ystad, Kappahl. Smooth passenger and goods conveyance with a lifting height of 0-13 metres

Flexible lifts with
small dimensions,
smart features and
low sound levels.

All our lifts are
designed for those with
physical disabilities.



PL400 MICRO Hörby, Grand Hotel

Shops, hotels, schools, public areas and private residencies. Nami's smooth passenger and goods conveyance can be integrated everywhere.

And if our standard models are not suitable then we custom-build one to your dimensions.

Flexible, safe and smooth-running.


PL400 Private residence



PL400 Kävlinge, Elementary school



PL401 Åland, Hotel

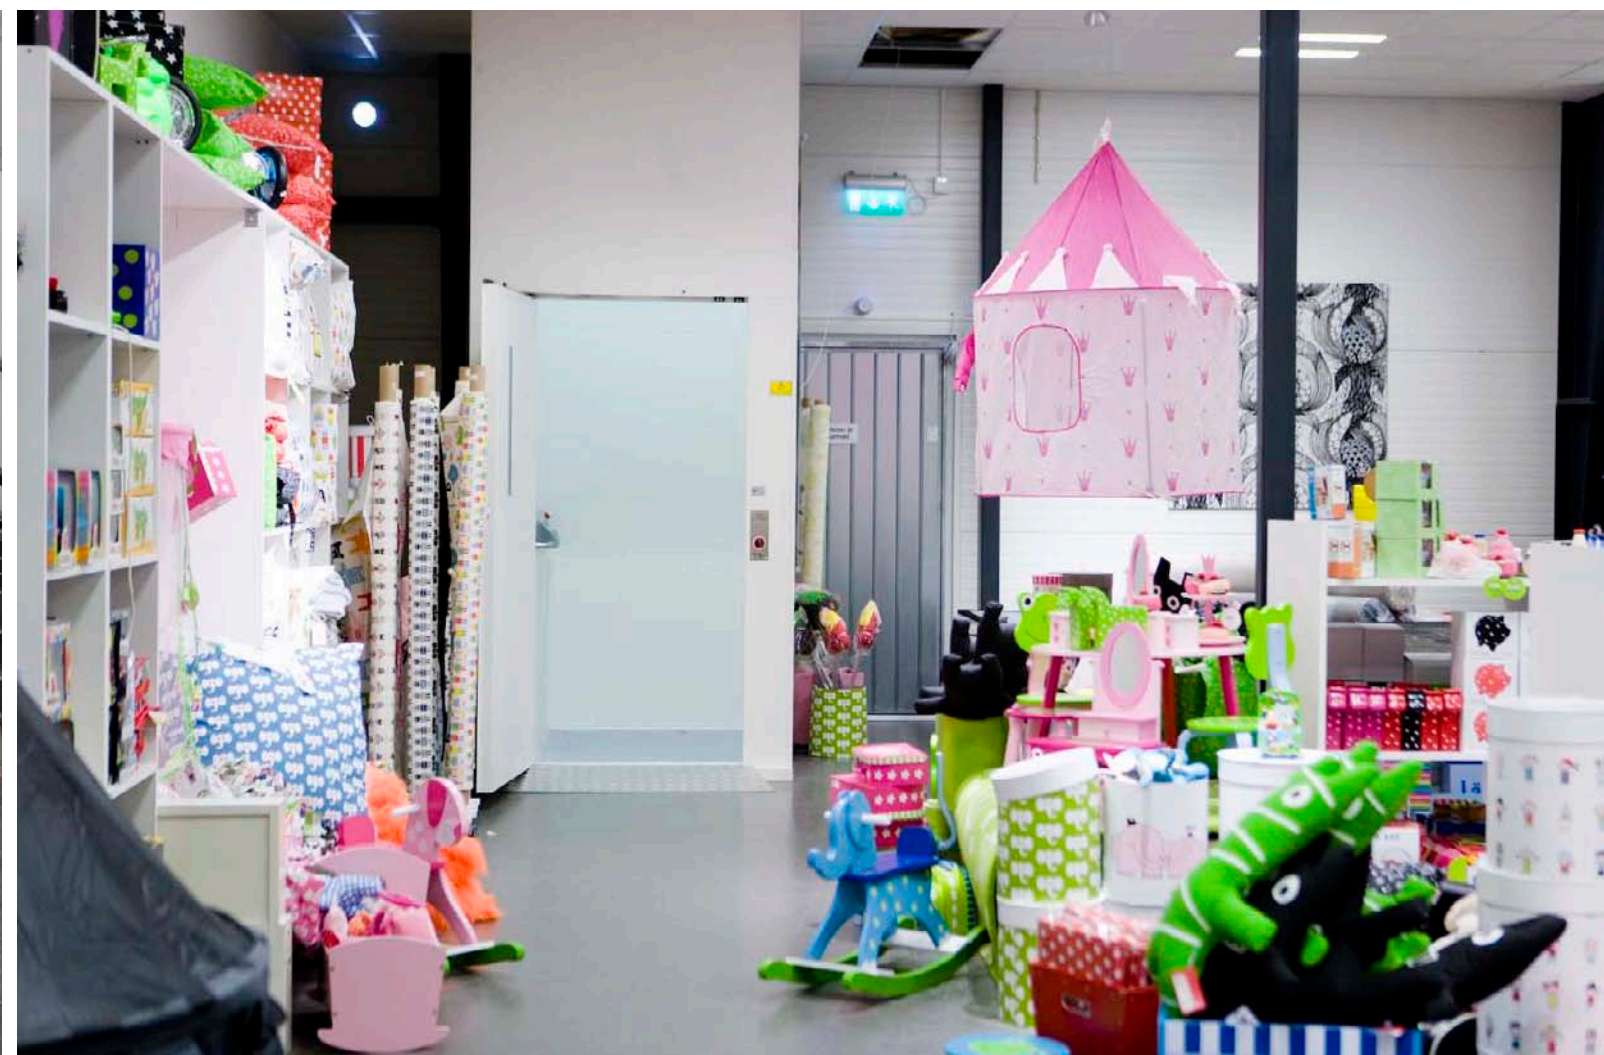

PL400 Bromölla, Mairo



The overall impression is important in all contexts. We let a designer design our lift panel. It has easy operation and a signal system that calls the lift to the chosen floor. The buttons are distinct and equipped with braille.




Passenger lifts

TECHNICAL DATA:

				
STANDARD EQUIPMENT	PL400	PL500	PL401	MSW B-LIFT
Drive system	Screw-driven	Screw-driven	Belt-driven	Screw-driven
Frequency control	Standard	Standard	Standard	Optional features
Lifting capacity	400kg	500 kg	400 kg	300 kg
Lifting height	0-13m	0-13m	0-13m	0-3 m
Electrical connection	1-phase 240V 16A	1-phase 240V 16A	1-phase 240V 10A	3-phase 400V 16A
Platform	1100x1500mm (Standard) 850x1250mm (Micro) (can be custom built)	1100x1600mm (Standard) 1100x1700mm (Macro) (can be custom built)	1100x1500mm (Standard) 850x1250mm (Micro) (can be custom built)	910x1400mm
Max. platform size	1.6 m ²	2.0m ²	1.6 m ²	
Shaft	1400x1600mm (Standard) 1150x1350mm (Micro)	1400x1700mm (Standard) 1400x1800mm (Macro)	1300x1600mm (Standard) 1050x1350mm (Micro)	1260x1500mm
Pit or ramp	50 mm	50 mm	50 mm	60 mm
Doors	A1 with electric lock, 900x2000mm	A1 with electric lock, 900x2000mm	A1 with electric lock, 900x2000mm	Gate with electrical lock Galvanized
Surface treatment	Plastic film laminated hot galvanised sheet plating	Plastic film laminated hot galvanised sheet plating	Plastic film laminated hot galvanised sheet plating	Galvanized
Colours	Dobel 1072 broken white	Dobel 1072 broken white	Dobel 1072 broken white	

Passenger and goods lifts

TECHNICAL DATA:

			
STANDARD EQUIPMENT	GL800	GL1000	GL2000
Drive system	Screw-driven	Screw-driven	Screw-driven
Frequency control	Standard	Standard	Standard
Lifting capacity	800 kg	1,000 kg	2,000 kg
Lifting height	0-13m	0-13m	0-13m
Electrical connection	3-phase 400V 20A	3-phase 400V 20A	3-phase 400V 32A
Platform	1100x1700mm (can be custom built)	1200x2100mm (can be custom built)	1500x2000mm (Standard) 2000x2000mm (Macro)
Max. platform size	2.0m ²	3.75 m ²	4.0 m ²
Shaft	1500x1800mm	1600x2200mm	1820x2100 (Standard) 2320x2100 (Macro)
Pit or ramp	70 mm	100 mm	70-100 mm
Doors	A1 with electrical lock 900x2000mm	A1 with electric lock, 1000x2000mm	A1 double door with electric lock, 1500x2000mm (Standard) 2000x2000mm (Macro)
Surface treatment	Plastic film laminated hot galvanised sheet plating	Plastic film laminated hot galvanised sheet plating	Plastic film laminated hot galvanized sheet plating
Colours	Dobel 1072 broken white	Dobel 1072 broken white	Dobel 1072 broken white

Optional features

Glazed shaft
Fire-resistant doors
Automatic door openers

Key control
School control

Remote controlled
infra link
Other colour

Stainless steel
Other platform size



Gate



A2:1 door



A2 door



A3 door



Double door

STANDARD PANEL



Dealers:

